




UNIRAP™ Mounting Bases

Acrylic Adhesive, Rubber Adhesive, and Screw Mounting



Introduction

We are pleased to announce the expansion of our nylon mounting bases. Mounting bases are an effective, versatile, and durable wire management mounting product for routing and securing wires and cables in place. These mounting bases are easy to install and are available in a variety of styles to attach to the mounting surface. The mounting bases are square with rubber or acrylic adhesive, and/or 1, 2, or 4 screw holes for mounting depending on the design. Acrylic adhesive is recommended for applications requiring more adhesive strength and in high temperature environments. Additionally, acrylic adhesive bases are more durable and suitable for mounting on plastics and metals producing a secure bond between oily and/or contaminated surfaces. All the mounting bases are available in Natural or UV Black color.

Mounting bases are used in conjunction with cable ties to stabilize and secure wire bundles. The bases not only improve aesthetics, but are suitable for both indoor and outdoor applications. Mounting bases provide a quick, economical, and dependable solution for supporting, routing, and protecting wires or cables.

Features & Benefits

- 4-way mounting bases are available in four sizes to accommodate CT18 through CT50 series cable ties
- Easy, durable method for routing and securing wire bundles or cables
- Smooth edges for wire protection and safe, comfortable handling
- Secure mounting to masonry and other types of surfaces
- Quick, easy installation
- Suitable for indoor and outdoor applications
- Easy tie insertion from all four sides
- Variety of mounting methods (1, 2, or 4 screws, acrylic or rubber adhesive)
- Nylon 6/6 material, available in Natural or Black
- Low profile design of base keeps bundles positioned closer to mounting surface conserving space
- Robust design withstands increased installation force
- Acrylic adhesive is recommended for high temperature locations as well as when certain chemicals or UV radiation is a concern
- Adhesive mounting options to support wire bundles where mounting holes aren't possible due to mounting surface material or location


Customer Service 1-800-346-4175 | Tool Service Center 1-800-426-8720 | Technical Services 1-800-451-4956 | www.burndy.com

UNIRAP™ Mounting Bases

Acrylic Adhesive, Rubber Adhesive, and Screw Mounting

Markets


- Commercial
- Industrial
- Aerospace
- Automotive, Truck, Trailer
- Electronics
- Electrical Supply
- Marine

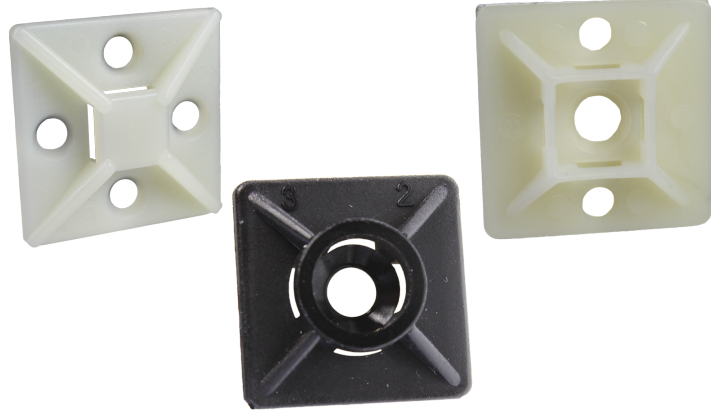

Applications

- To route wires in control panels and switchboards
- To support bundles of wires away from moving mechanical devices
- Routing and harnessing cables to prevent safety hazards
- To separate groups of wires for identification
- General purpose applications for mounting, fastening and joining
- Used for bonding, sealing, and mounting on wood, glass, metal, or other mounting surfaces

Slots to insert
cable tie

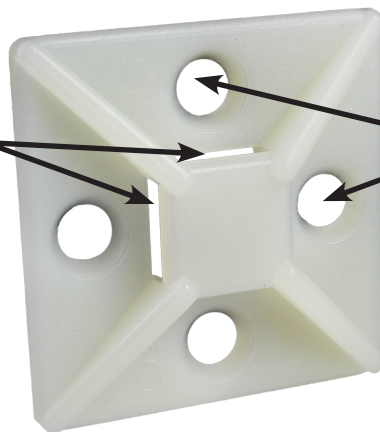

Screw holes
for mounting

Customer Service 1-800-346-4175 | Tool Service Center 1-800-426-8720 | Technical Services 1-800-451-4956 | www.burndy.com

UNIRAP™

Type CTB STANDARD CABLE TIE MOUNTING BASES

BURNDY® offers a wide variety of mounting bases suited for many applications. Mounting bases are used in conjunction with cable ties to stabilize and secure wire bundles, both indoors and outdoors. Mounting bases can be secured to a surface using rubber based adhesive, acrylic adhesive, or also can be screw mounted.

The Rubber Adhesive has an operating temperature range from 14°F/-10°C to 140°F/60°C; Acrylic Adhesive has a temperature range of 14°F/-10°C to 176°F/80°C. When using the screw mounting option ONLY (not using any adhesive to secure the base) the product has a temperature range of -40°F/-40°C to 185°F/85°C.

These mounting bases are available to accommodate CT18 through CT50 series cable ties. Insertion of ties can be made from all sides. Each mount may be secured with screws, adhesive backing, or both, for ease of application and stability. For applications where higher temperatures, certain chemicals, or UV radiation are a concern and an adhesive is the preferred method for securing, the acrylic adhesive mounting bases are recommended.



Fig. #1




Fig. #2




Fig. #3

Std Pkg Catalog Number	Mounting Method	Figure #	Color	Min Tensile Strength (lbs)	Max Tie Slot Width [mm]	Width Inches [mm]	Length Inches [mm]	Bulk Catalog Number
CTB075AAF1C	Acrylic Adhesive or #6 or #8 Screw	1	Natural	11	.17 [4.2]	0.75 [19]	0.75 [19]	CTB075AAF1M
CTB075AAF1C0	Acrylic Adhesive or #6 or #8 Screw	1	UV Black	11	.17 [4.2]	0.75 [19]	0.75 [19]	—
CTB075RAF1C	Rubber Adhesive or #6 or #8 Screw	1	Natural	11	.17 [4.2]	0.75 [19]	0.75 [19]	CTB075RAF1M
CTB075RAF1C0	Rubber Adhesive or #6 or #8 Screw	1	UV Black	11	.17 [4.2]	0.75 [19]	0.75 [19]	—
CTB075SF1C	#6 or #8 Screw Only	1	Natural	11	.17 [4.2]	0.75 [19]	0.75 [19]	CTB075SF1M
CTB100AAF2C	Acrylic Adhesive or #10 Screw	2	Natural	36	0.22 [5.5]	1.12 [28.4]	1.12 [28.4]	CTB100AAF2D
CTB100AAF2C0	Acrylic Adhesive or #10 Screw	2	UV Black	36	0.22 [5.5]	1.12 [28.4]	1.12 [28.4]	—
CTB100RAF2L	Rubber Adhesive or #10 Screw	2	Natural	36	0.22 [5.5]	1.12 [28.4]	1.12 [28.4]	CTB100RAF2C CTB100RAF2D
CTB100RAF2C0	Rubber Adhesive or #10 Screw	2	UV Black	36	0.22 [5.5]	1.12 [28.4]	1.12 [28.4]	—
CTB100SF2C	#6 or #8 Screw Only	2	Natural	36	0.22 [5.5]	1.12 [28.4]	1.12 [28.4]	—
CTB150AAF3C	Acrylic Adhesive or #10 Screw	3	Natural	58	0.39 [10]	1.51 [38.4]	1.51 [38.4]	CTB150AAF3D
CTB150RAF3C0	Rubber Adhesive or #10 Screw	3	UV Black	58	0.39 [10]	1.51 [38.4]	1.51 [38.4]	—
CTB150RAF3D	Rubber Adhesive or #10 Screw	3	Natural	58	0.39 [10]	1.51 [38.4]	1.51 [38.4]	—
CTB150SF3C	#6 or #8 Screw Only	3	Natural	58	0.39 [10]	1.51 [38.4]	1.51 [38.4]	—
CTB150RA4C	Rubber Adhesive or #10 Screw	3	Natural	58	0.39 [10]	1.51 [38.4]	1.51 [38.4]	—